


COMPOSITE SCAFFOLD ANCHOR

INCREASED SAFETY ON THE CONSTRUCTION SITE

INNOVATION



WITH COMPOSITE-HOOK
MIN. 300 KG
TENSION- AND COMPRESSIVE FORCE


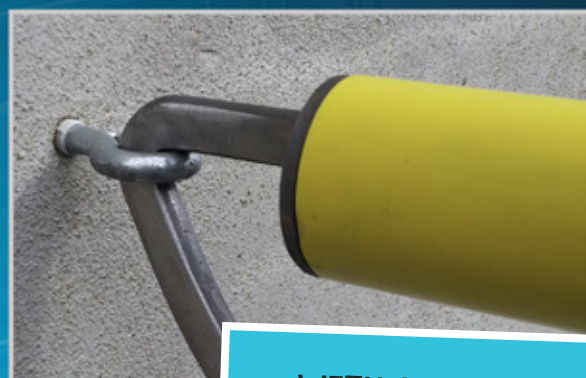


WITH STEEL-HOOK
MIN. 1.000 KG
TENSION- AND COMPRESSIVE FORCE

According to DIN 4420 all free-standing scaffolding must be anchored vertically and parallel to the facade (tension/compression). The scaffold anchoring prevents the risk of the scaffold pulled out from the façade due, load or wind pressure (pull arrow) or pressed up against the facade (push arrow).

SAFETY CAP

Extra security on the scaffolding! No more head injuries! The newly developed safety cap minimizes the risk of head injuries. It is easily applied and fits all pipes.

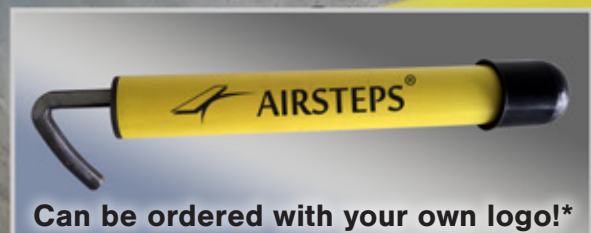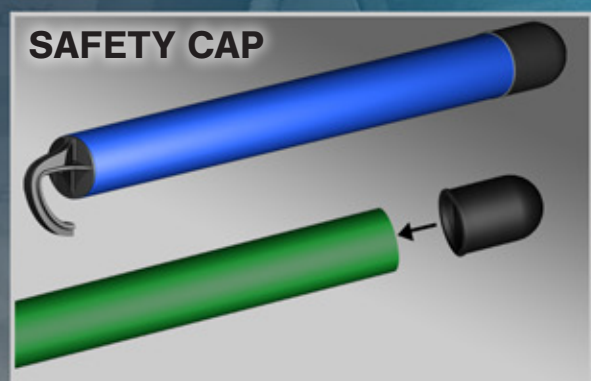

Can be ordered with your own logo!*

LIGHT AND STRONG

- 5 STANDARD-COLOR (ORANGE, RED, BLUE, GREEN & YELLOW) CAN BE PRODUCED IN ANY COLOR
- Ø 48.3MM
- LENGTH: UP TO 1,5M